

ALCALÁ II

TOUCH-ACTIVATED ELECTRONIC FOOT WASHER

SPECIFICATIONS

Self-closing, solid brass, wall mounted foot washer. Touch operated by piezo switch. Built-in filter. Internal 9V battery. Maximizes hygiene and saves water. With easily cleanable silicone nozzles. Default flow time of 8 seconds, adjustable on site. Unique On/Off function allowing the flow to be stopped mid-cycle for addition water saving. Optional automatic 24 hour hygiene flush.

OPERATION


Touching the designated area starts an 8 seconds flow cycle. A second touch before the flow time is over will stop the water flow. The flow time is adjustable on site. Features an optional anti Legionella and freeze protection hygiene flush every 24 hours.

APPLICATION

Kassel's new self-closing foot wash control provides an electronically-controlled accurate discharge with comfortable operation. Ideal for swimming pools, beaches and ablution at places of worship.

| PRODUCT AT A GLANCE | |
|----------------------|---|
| Installation | Exposed wall mounted |
| Power Supply | 9V battery |
| Operating pressure | 1.0-6.0 bar (15.0-88.0 PSI) |
| Water supply | Cold and premixed water |
| Water flow | 9 lpm / 2.38 gpm |
| Water Saving Options | 7 lpm / 1.85 gmp / 6 lpm / 1.59 gmp - Flow restrictor |
| Flow Time | 8 seconds default factory time. Adjustable on site |

| ORDERING INFORMATION | | | |
|----------------------|-------------|---------------|---|
| PRODUCT NAME | PART NUMBER | POWER OPTIONS | ADDITIONAL FEATURES |
| ALCALÁ II | KSL000405 | 9V BATTERY | EXPOSED INSTALLATION DIRECTIONAL SHOWER HEAD |

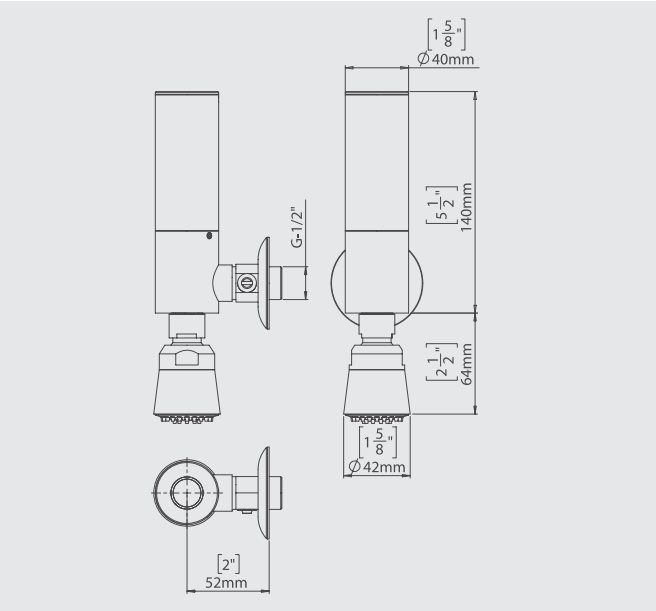

Kassel Sanitär S.L.
• Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, **Spain**
• Daimlerstraße 2, D-93133 Burglengenfeld, **Germany**
Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es