

ÁMBAR CONTACT

ELECTRONIC SHOWER CONTROL

SPECIFICATIONS

Self-closing electronic shower control. Activated by touching the designated piezo switch. For cold and premixed water. Includes non-return valves and filters. All components are located inside the product body for added vandal protection. Powered by a 9V battery or a 9V transformer. 24 hour hygiene flush is included. The shower will automatically shut off after a factory set flow time of 2 minutes. Flow time is adjustable on site.

OPERATION

When users touch the designated area in the middle of the piezo surface, a flow cycle of 2 minutes is activated. If the users do not require more water, a second touch stops the water flow before the default flow time has passed.

APPLICATION

The easy touch action allows use by young children, the elderly and the disabled. Ideal for outdoor and indoor installations, hospitals, hotels, spas, resorts, swimming pools and private residences.

PRODUCT AT A GLANCE

Installation	Concealed wall-mounted
Power Supply	• 9V battery • 9V transformer
Operating pressure	0.5-8.0 bar (15.0 - 116.0 PSI).
Water Supply	Cold and premixed water
Water Temperature	70°C Maximum


ORDERING INFORMATION

MODEL	CODE	POWER
ÁMBAR CONTACT	KSL00830	9V battery/ 9V transformer

OPTIONS

OPTION	CODE
REMOTE CONTROL	KSL01030

KS
Kassel Sanitär

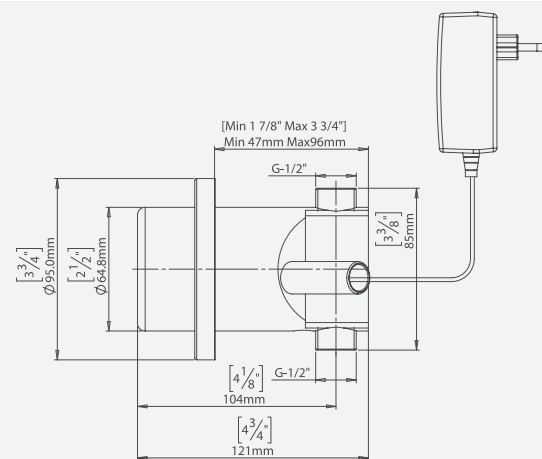

Kassel Sanitär S.L.

- Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, **Spain**
- Daimlerstraße 2, D-93133 Burglengenfeld, **Germany**

Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es