SPECIFICATIONS

Self-closing electronic shower control. Activated by touching the designated piezo switch. With mixer for water temperature adjustment for hot and cold water. Includes non-return valves, filters and Thermostop at 38°C. All components are located inside the product body for added vandal protection. Powered by a 9V battery or a 9V transformer. 24 hour hygiene flush is included. The shower will automatically shut off after a factory set flow time of 2 minutes. Flow time is adjustable on site.

OPERATION

When users touch the designated area in the middle of the piezo surface, a flow cycle of 2 minutes is activated. If the users do not require more water, a second touch stops the water flow before the default flow time has passed.

APPLICATION

The easy touch action allows use by young children, the elderly and the disabled. Ideal for outdoor and indoor installations, hospitals, hotels, spas, resorts, swimming pools and private residences.


PRODUCT AT A GLANCE		
Installation	Concealed wall-mounted	
Power Supply	9V battery9V transformer	
Operating pressure	0.5-8.0 bar / 7.0-116.0 psi	
Water supply	Hot and cold water	
Water Temperature	Maximum 70°C	

ORDERING INFORMATION				
MODEL	CODE	POWER SUPPLY		
CORELLA CONTACT DÚO	KSL00820	9V battery9V transformer		

ORDERING INFORMATION			
OPTION	CODE		
REMOTE CONTROL	KSL01030		





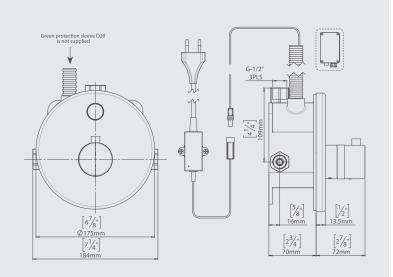

Kassel Sanitär S.L.

Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, Spain
Daimlerstraße 2, D-93133 Burglengenfeld, Germany