

RONDA N

TOUCH-FREE ELECTRONIC LAVATORY FAUCET

SPECIFICATIONS

Touch-free wall-mounted electronic faucet. Activated by an infrared sensor. For cold or premixed water. Powered by 9V battery or a 9V transformer. Chrome plated body, other finishes available. Adjustable setting by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

OPERATION

The faucet will automatically activate when users place their hands in the sensor range and will stop once the users remove their hands.


APPLICATION

Wall-mounted faucet. Combines a minimalistic design with vandal resistant features. Helps washrooms stay clean and saves water. Easy installation. Long lasting even in the harshest installation sites. Ideal for shopping malls, sport facilities and entertainment centers.

PRODUCT AT A GLANCE

Installation	Concealed wall-mounted
Power Supply	• 6 x 1.5 AA batteries • 9V transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 psi
Water Supply	Cold and premixed water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	PCA spray - 4 lpm / 1 gpm ; 3 lpm / 0.8 gpm ; 1.89 lpm / 0.5 gpm
Water Temperature	70°C Maximum
Security Time	90 seconds. Adjustable by remote control

FLOW RATE vs PRESSURE

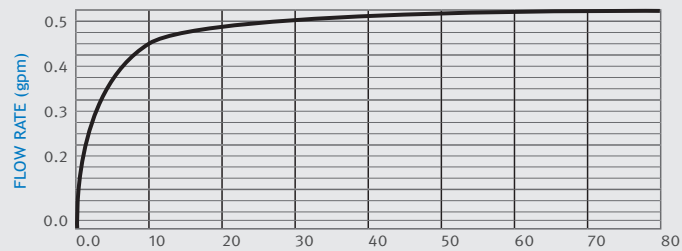

This graph applies to 0.5 GPM option only.



LINE PRESSURE (PSI)

ORDERING INFORMATION

MODEL	CODE	POWER	ADDITIONAL FEATURES
RONDA N	KSL00175	<ul style="list-style-type: none"> • 6 x 1.5 AA batteries • 9V transformer 	Concealed installation in plaster or dry wall

OPTIONS

OPTION	CODE
Remote control	KSL01030
Matching RONDA WALL MOUNTED Soap Dispenser	KSL00930
Matching RONDA ESPUMA soap dispenser	KSL00995

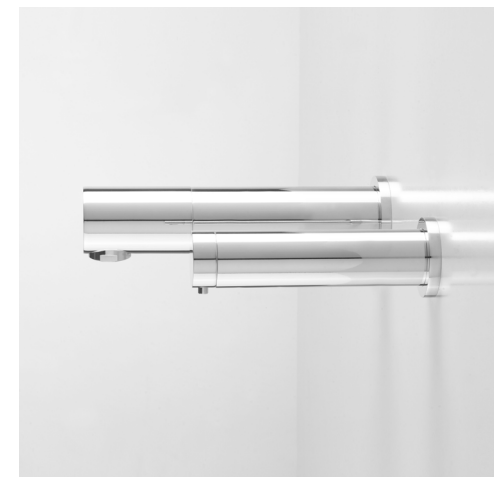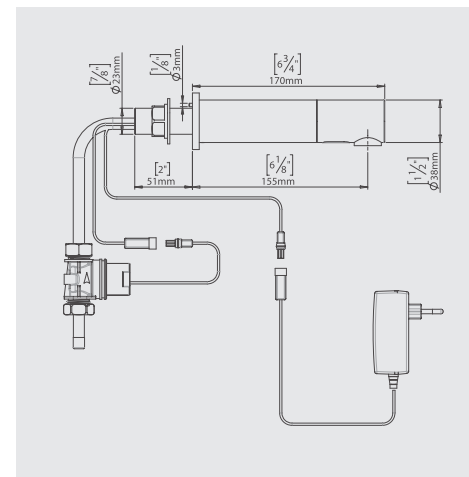

Kassel Sanitär S.L.

- Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, **Spain**
- Daimlerstraße 2, D-93133 Burglengenfeld, **Germany**

Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es