

SENSE / SHOW SENSOR KIT FOR TOILETS WITH PRIMARY FLUSH

This kit is designed to operate a two volume flush valve. The sensor detects the user at a given distance, and operates an automatic flush using the sensor's sense function once the user has left the toilet. Depending on time and distance, the system delivers 3 liters to evacuate liquids and 6 liters to evacuate solids. To maximize hygiene, the system allows the to operate a primary cleaning flush using the sensor's show function.

Advantages:

- Drastically reduces water consumption
- No physical contact. Helps to protect users against cross contamination.
- Primary cleaning flush upon presentation of hand that allows the user to operate a cleaning flush before using the system, when user presents the hand at a short distance at the front of the sensor.
- Water saving dual flush performance
- Settings adjustable with the Kassel remote control
- Maximum achievement of LEED points

PRODUCT AT A GLANCE


Installation	Cross wall installation
Power Supply	9V Transformer with a backup system in case of power failure
Operating pressure	1.0-8.0 bar / 14.5-116.0 psi
Water flow	6 lpf full flush / 1.58 GPF, 3 lpf half flush / 0.8 GPF Water will flush after the user moves away from the toilet. If the user spends less than one minute in front of the sensor, a half flush (3 liters) will take place. For more than one minute, a full flush (6 liters) will take place.
Hygiene flush	To maximize hygiene, this product is equipped with a 24 hour duty flush. The flush takes place after 24 hours of non use. Prevents the trap seal from drying out, possible freezing of pipes, and gets rid of potential bacteria in standing water. This function can be disabled using the remote control.

ORDERING INFORMATION

PRODUCT NAME	PART NUMBER
SENSE / SHOW SENSOR KIT FORTOILETS	KSL00561

OPTIONAL ACCESSORIES

PRODUCT NAME		PART NUMBER
REMOTE CONTROL	Customization of the following settings and functions: security time, delay in time, delay out time, on-off and reset.	KSL01030
JUNCTION BOX	Connection point with transformer, that allows to connect up to 10 products together.	KSL01110

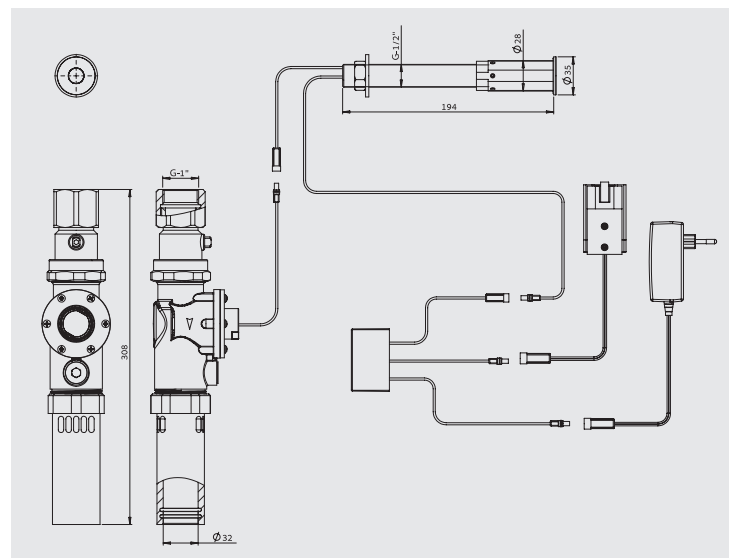

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED



GERM FREE



MAXIMIZES HYGIENE

Kassel Sanitär S.L.

- Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, Spain
- Daimlerstraße 2, D-93133 Burglengenfeld, Germany

Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es