

# GUARDA DÚO TOUCH-FREE ELECTRONIC WALL-MOUNTED FAUCET

## SPECIFICATIONS

Touch-free electronic faucet for wall-mounted installations. Activated by wave on-off infrared sensor. With a mixer for water temperature adjustment for hot and cold water. Swivel spout. Filters included. Powered by a 9V battery. Includes a low battery indicator. The solenoid valve is located above deck inside the product for added vandal protection. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

## OPERATION


The faucet is activated when users place their hands within close proximity of the sensor. Water will flow for a factory set time of 8 seconds. Placing the hands in close proximity to the sensor for a second time will shut off the water flow before the cycle is completed.

## APPLICATION

High quality, vandal resistant faucet. Helps washrooms stay clean and hygienic and saves water. Ideal for retrofit installations and bucket sinks.

### PRODUCT AT A GLANCE

Installation	Exposed wall-mounted
Power Supply	· 9V battery · 9V Transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 psi
Water supply	Hot and cold water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	4 LPM / 1 GPM ; 3 LPM / 0.8 GPM ; 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	90 seconds. Adjustable with a remote control.

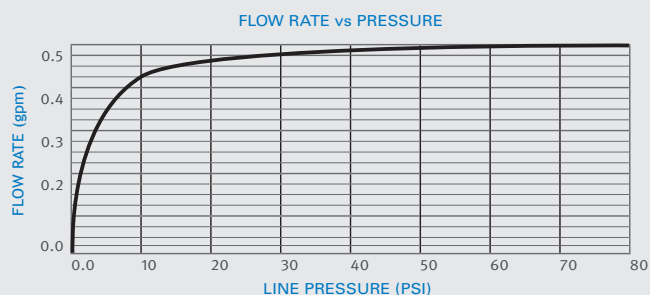


This graph applies to 0.5 GPM option only.

### ORDERING INFORMATION

PRODUCT NAME	CODE	POWER	ADDITIONAL FEATURES	OPTION	CODE
GUARDA DÚO	KSL00320	Internal 9V battery	Exposed installation With mixer for water temperature adjustment	Remote Control	KSL01030

### OPTIONS

**KS**  
Kassel Sanitär

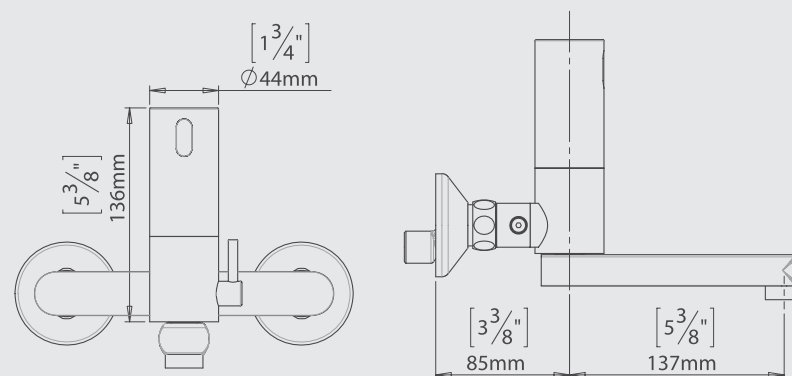

### Kassel Sanitär S.L.

- Avda. de Castilla, 1 - Polígono Industrial, 28830 San Fernando de Henares, Madrid, Spain
- Daimlerstraße 2, D-93133 Burglengenfeld, Germany

Tel. +34 916 778 993 | Fax. +34 916 777 774 | info@kassel.es | www.kassel.es