MORELLA

SPECIFICATIONS

Touch-free wall-mounted electronic faucet. Activated by an infrared sensor. For cold or premixed water. Powered by a 9V battery or a 9V transformer with an integrated 9V battery backup system in case of power failure. Chrome plated body, other finishes available. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

OPERATION

The faucet will automatically activate when users place their hands in the sensor range and will stop once the users remove their hands.

APPLICATION

Wall-mounted faucet. Combines a minimalistic design with vandal resistant features. Helps washrooms stay clean and saves water. Easy installation. Long lasting even in the harshest installation sites. Ideal for shopping malls, sport facilities and entertainment centers.


PRODUCT AT A GLANCE			
Installation	Concealed wall-mounted		
Power Supply	• 9 V battery • 9 V Transformer with backup system		
Operating pressure	0.5-8.0 bar / 7.0-116.0 psi		
Water Supply	Cold and premixed water		
Water flow	5 LPM / 1.32 GPM		
Water Saving Options	1.89 LPM / 0.5 GPM		
Water temperature	70°C Maximum		
Security Time	90 seconds. Adjustable by remote control		



This graph applies to 0.5 GPM option only.

ORDERING INFORMATION				
PRODUCT NAME	PART NUMBER	POWER OPTIONS	ADDITIONALSPECIFICATIONS	
MORELLA	KSL00390	9 V battery	Wall mounted in plaster or dry walls as well as in brick and concrete walls. Dual power input box.	
		9 V transformer		



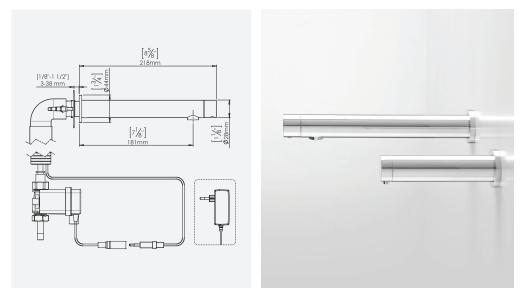

Kassel Sanitär S.L.

PART NUMBER

KSL01030

KSL00935

- Avda. de Castilla, 1 Polígono Industrial, 28830 San Fernando de Henares, Madrid, Spain
- Daimlerstraße 2, D-93133 Burglengenfeld, Germany